

VITO 60

Spec-Sheet



VITO 60 - Filtration system for coolant lubricants, oils and watery solutions

VITO 60 is suitable for small industrial basins. Filtration of small volumes of coolant lubricants. Filtration power up to 60 l / 132 lbs, per minute.

Functionality:

VITO cleans and ventilates your coolant lubricant to ensure its optimum quality. The VITO is placed directly into the basin. The vortex created by the machine removes chips and microparticles up to 5 µm from your fluid and keeps it ventilated to prevent the growth of fungus & bacteria. Due to the extended service life and the decreased tool wear, you achieve a reduction of your operating costs as well as a consistent quality of your workpieces.

VITO 60 saves coolant lubricant, labour, stock ground and transport costs.

Big savings:

- less tool wear
- less personnel costs
- less transport costs
- less disposal costs
- fast amortisation

Constant quality:

- ...of your coolant lubricant
- ...of your workpieces


Easy handling:

- fast pressure filtration
- low cleaning effort



VITO 60


Spec-Sheet

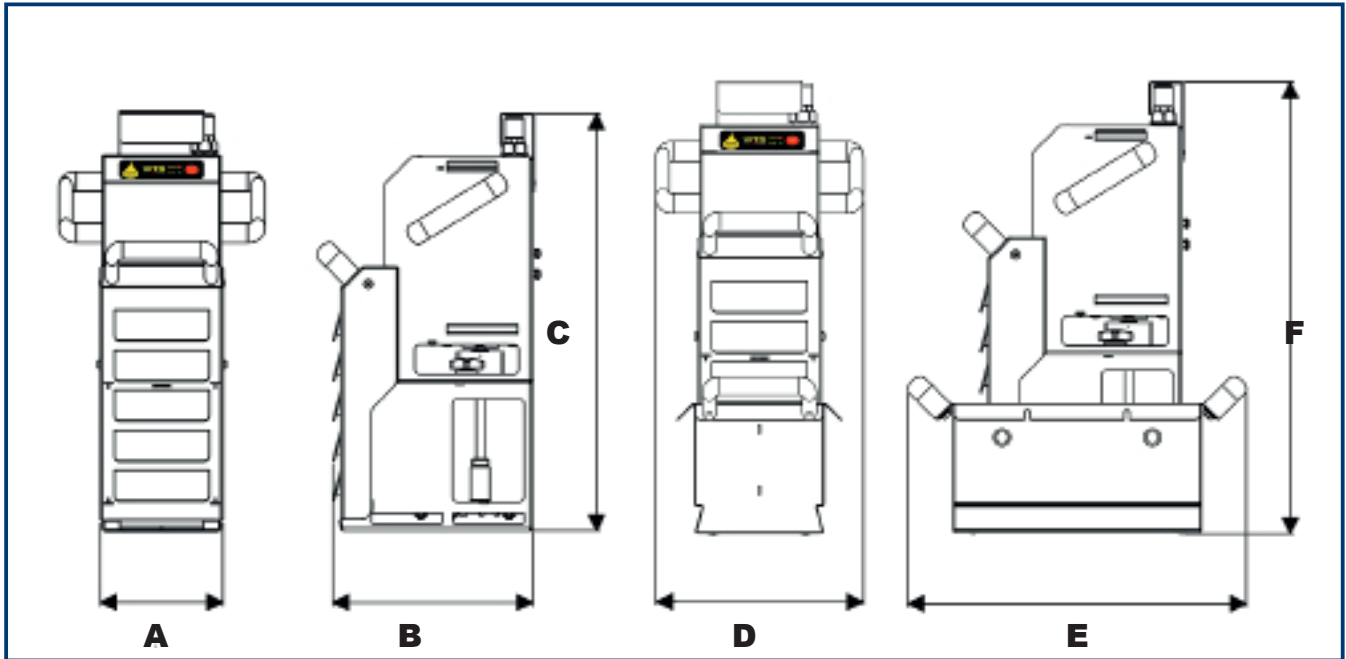

VITO 60 technical data:

	Width A	Depth B	Height C		Width D	Depth E	Height F	
without drip pan	116 mm 4.6 in	191 mm 7.5 in	398 mm 15.6 in	with drip pan	195 mm 7.7 in	320 mm 12.6 in	426 mm 16.8 in	
Filtration power	Filtration	Particle uptake	Cycle time	Suction depth	Weight	Temperature	Material VITO	Particle filter
up to 60l/min 132 lbs/min	up to 5 µm	1,3l 2,9 lbs	4,5 min (adjustbale)	~ 35 cm 13.8 in	7,7 kg 17 lbs	max. 200°C max. 397°F	Stainless steel 1.4301	Polyester-cellulose
Maximum Power	Power connection							
300 W	220-240 V / 100-120 V 50-60 Hz							

Additional information:

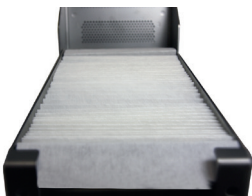

Changeable polyester cellulose filter




VITO Fryfilter, Inc.
Arlington Heights, IL 60005

P: +1-847-859-0398
info@vitofryfilter.com
www.vitofryfilter.com